

Stay out for longer with Keis Heated Apparel

MOTORCYCLING ■ FISHING ■ HORSE RIDING ■ FLYING ■ SNOWSPORTS ■ CONSTRUCTION

Visit

www.keisapparel.co.uk

to see the full range of Keis Heated Apparel
and Accessories – All designed to
help you stay out longer!



In the interests of product improvement we
reserve the right to make technical and
design changes without notice.

www.keisapparel.co.uk

Keis Heated Clothing is distributed in the UK by
Motohaus Powersports Limited PO Box 7092 Hook RG29 1TY
www.motohaus.com Email: sales@motohaus.com



Heated apparel for
outdoor activities




HEATED OUTER GLOVES

OPERATING INSTRUCTIONS

MOTORCYCLING ■ FISHING ■ HORSE RIDING ■ FLYING ■ SNOWSPORTS ■ CONSTRUCTION

KEIS HEATED OUTER GLOVES

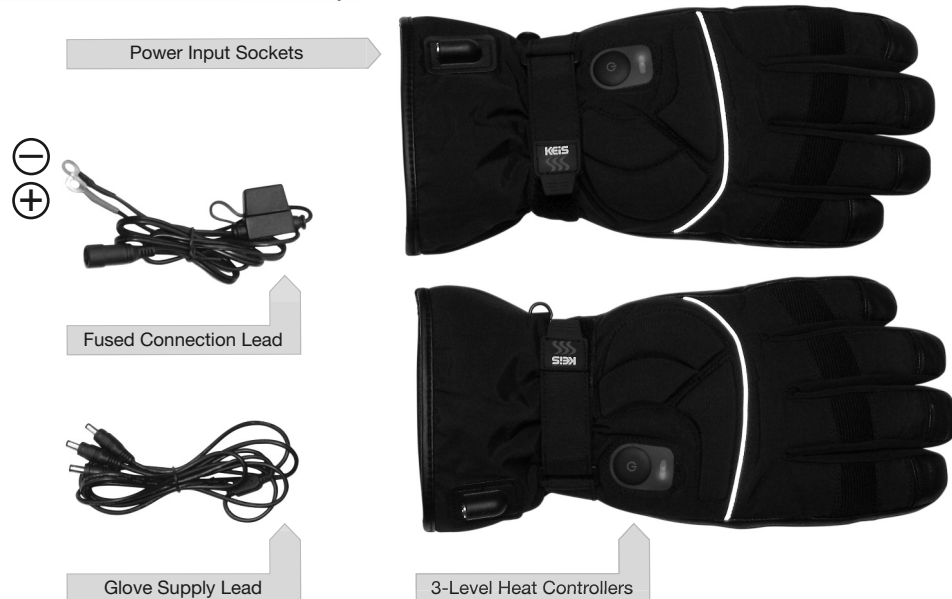

SAFETY & ENVIRONMENT FIRST

- Do not dispose of electrical equipment with standard domestic waste. Contact your local authority for information specific to your area.

WARNING

- This electrically heated garment must be used strictly in accordance with the manufacturer's instructions. Failure to observe this notice may lead to increased risk of burns and fire resulting in injury or death.
- Switch the garment off immediately and check the affected skin at any sign of irritation or sensation of excessive heat.
- Never leave the garment unattended when switched on.
- This product is unsuitable for young children.
- Do not use this product if you suffer from: heightened or impaired temperature sensitivity; an inability to sense temperature extremes; circulatory problems resulting from diabetes or other medical conditions.
- When operating with batteries use only the appropriate Keis Battery Pack and Charger.
- When operating using a vehicle battery ONLY use this product with 12V systems.
- Ensure replacement fuses are rated at 5A ONLY.
- Do not modify or disassemble any part of the system in any way.
- Do not use if the product is visibly damaged.

PREPARING A VEHICLE TO POWER YOUR KEIS HEATED GLOVES

If powering your Keis Heated Outer Gloves from a vehicle battery attach the Fused Connection Lead directly to the battery or other live 12V source taking into account any safety notices issued by the vehicle manufacturer and observing the polarity Red +ve and Black -ve. Position the power socket so it is in a convenient position to power your garment and secure if necessary using cable ties or tape ensuring that it cannot interfere with the normal operation of the vehicle.

PREPARING THE GLOVES SUPPLY LOOM

Thread the Glove Supply Loom through your jacket with one plug positioned at the end of each arm and one protruding from the waist on the side from which the power will be provided. Note: The shorter of the two leads on the Glove Supply Loom should be positioned on the side from which you will connect the power! If you use the gloves on a regular basis consider using thread to tack the Glove Supply Loom into the lining of the jacket.

POWERING YOUR KEIS HEATED OUTER GLOVES FROM A VEHICLE POWER SOURCE

Your Keis Heated Outer Gloves can be powered directly from the Fused Connection Lead as installed above or the optional Cigarette Lighter/Accessory Plug (Pt. No. W54-BSB12).

POWERING YOUR KEIS HEATED OUTER GLOVES FROM OTHER KEIS HEATED GARMENTS

Some models of Keis Heated Garments have dedicated power supply sockets for accessories which means they can share a single power source. Note: In some cases additional supply leads may be required. Ask your dealer for details or visit www.keisapparel.co.uk.

These Heated Outer Gloves have integral Heat Controllers and will not function correctly if powered via a second Controller. Use the Three Way Connector (Pt No. W54-TWC) to facilitate a direct connection to an uncontrolled 12V power source if required. The use of Li-ion batteries with integral controllers is also not recommended.

OPERATING THE INTEGRAL HEAT CONTROLLERS

To operate press and hold the Power Button for one second. The Controller will initialise on Maximum power (100%). Briefly pressing the Power Button will cycle the temperature through 'Medium' (66%), 'Low' (33%) and back to Maximum.

To switch off press and hold the Power Button for one second. Note: the Glove Controllers are independent of each other.

CARE OF YOUR KEIS HEATED OUTER GLOVES

- Do not wash.
- The regular application of a good quality textile Proofer (i.e. SDoc100) is recommended.

TECHNICAL DATA

Material: Nylon/Leather

Voltage: 12V Only.

Typical Power: 6W each/12W per pair.